


**PELICAN HOOK FOR  
16" TANKER RAIL HOSES  
22-28MM CHAIN - 15.3 TONNE SWL**

**Allied Marine  
LOGISTICS  
LIMITED**

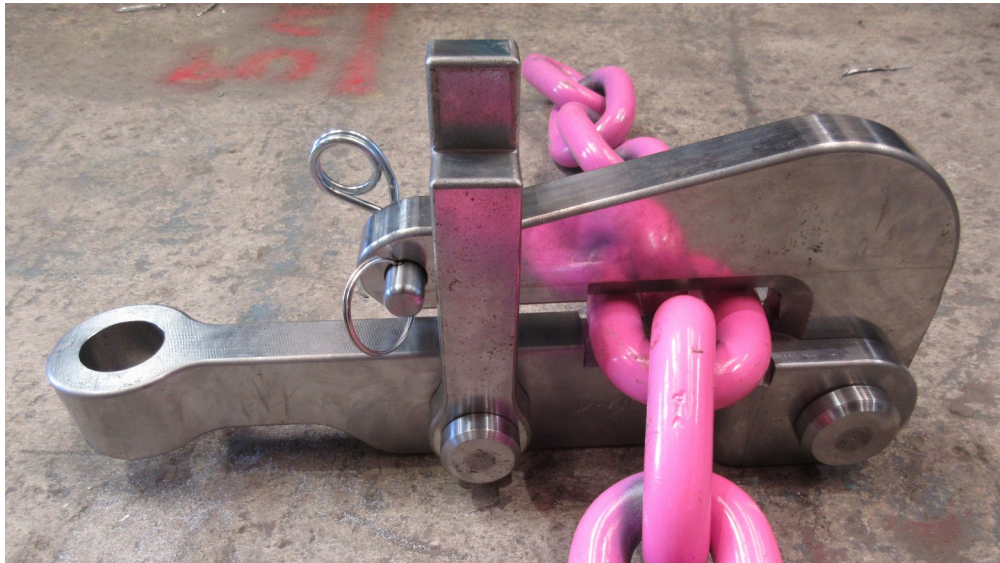

**PERFORMANCE**

**Safe Working Load:** 15.3 Tonnes (150kN).  
**Proof Load:** 38.2 Tonnes (375kN).  
**Minimum Break Load:** 76.5 Tonnes (750kN).  
**Corrosion Protection:** Thermal zinc spray.

**APPLICATION**

**Function:** To adjust the securing of the tanker rail hose snubbing chain at the tanker manifold.  
**Suitability:** Meets OCIMF GMPHOM 2009 strength requirements for 16" Tanker Rail Hose Pad-eyes.  
**Snubbing Chain Options:** 22-28mm Studlink or Studless chain up to Grade 100.  
**Shackle Suitability:** Bow or Dee Safety Shackles: 17 Tonne Grade 6.

**TYPE APPROVAL**

**Design Review:** Lloyd's Register Document No. PRJ11100396508-1 issue 01.  
**Requirements:** Lloyd's Register Code of lifting Appliances in Marine Environment, July 2022.  
**Certification:** Lloyd's Register Statement No. PRJ11100396924 determined SWL of 15.3 tonnes.

Allied Marine Logistics Limited  
3rd Floor, 207 Regent Street  
London, W1B 3HH  
United Kingdom

Tel: +44 (0)20 3355 8781  
Fax: +44 (0)20 3051 5716  
[www.almarlog.co.uk](http://www.almarlog.co.uk)

**Marine Hose Specialists**